




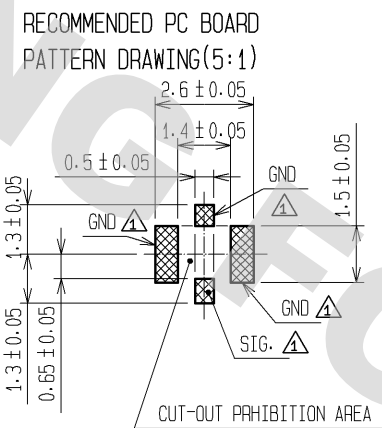



DIRECTION OF UNREELING

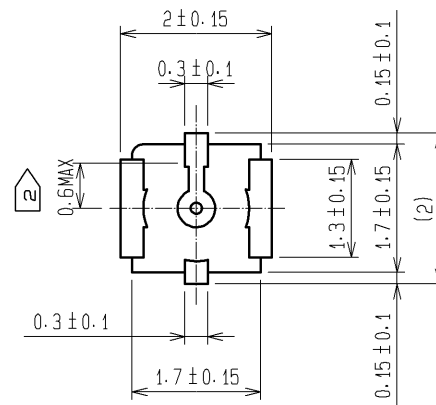

WATER SPLASHED AND CONDENSATION PLACES.
PLACE ATTENTION REQUIRED:HARSH TEMPERATURE CHANGE.

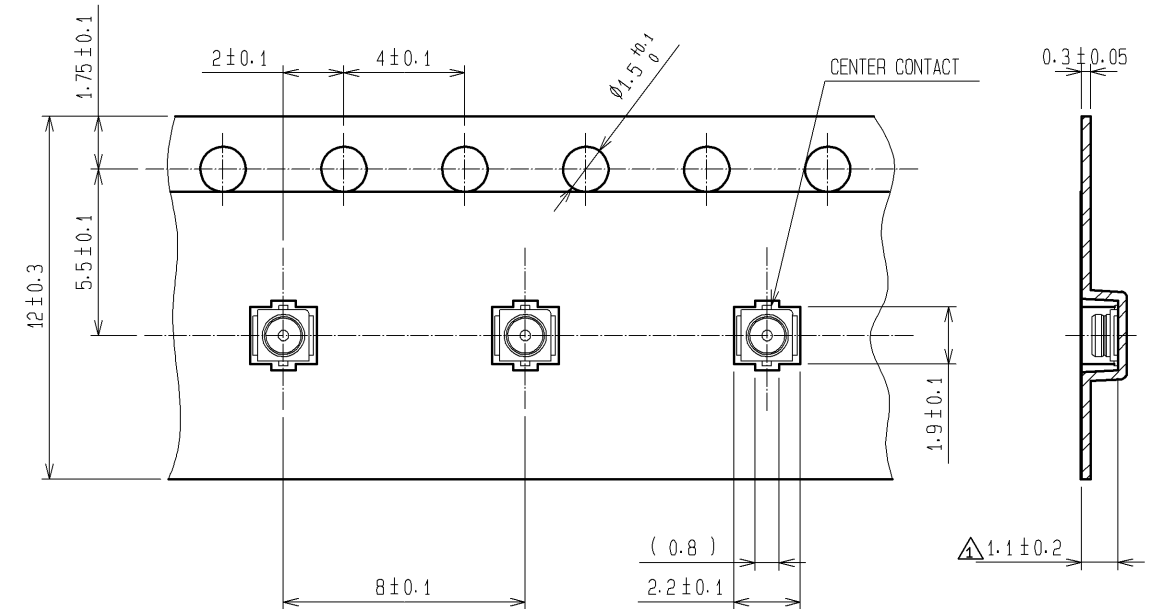

- METAL MASK THICKNESS: 0.1mm / 0.12mm
- Up to 2cycles of Reflow.

2	BRASS	GOLD PLATING						
1	PHOSPHOR BRONZE	SILVER PLATING		3	LCP	(BLACK). UL94V-0		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 10:1	COUNT  3	DESCRIPTION OF REVISIONS DIS-D-001378		DESIGNED YI. FUNADA	CHECKED NK. NINOMIYA	DATE 09. 03. 12
 HIROSE ELECTRIC CO., LTD.		APPROVED : IJ. MITANI		05. 01. 05	DRAWING NO. EDC3-138509-10			
		CHECKED : MH. YAMANE		05. 01. 05	PART NO. W. FL-R-SMT-1(10)			
		DESIGNED : NK. NINOMIYA		05. 01. 05	CODE NO. CL331-0482-6-10			
		DRAWN : MA. SAEKI		05. 01. 05	 1 / 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[W.FL-R-SMT-1\(10\)](#)